




DFNWB2×2-6L Plastic-Encapsulate MOSFETS

MP3009G P-Channel Enhancement Mode Field Effect Transistor


$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
-30V	19mΩ@-10V	-9A
	27mΩ@-4.5V	

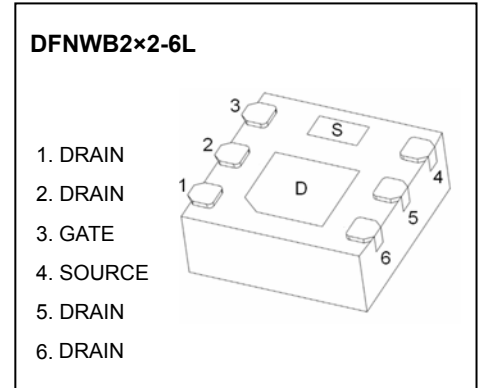

General Description


The MP3009G uses advanced trench technology to provide excellent $R_{DS(on)}$ with low gate charge. This device is suitable for use as a load switch or in PWM applications.

MARKING



P3009G = Part No.
 Solid dot = Pin1 indicator.
 XX = Code.

Equivalent Circuit



Maximum ratings ($T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	-30	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D	-9	A
Power Dissipation (note 3)	P_D	2	W
Thermal Resistance from Junction to Ambient (note 3)	$R_{\theta JA}$	62.5	$^\circ\text{C/W}$
Operation Junction and Storage Temperature Range	T_J, T_{stg}	-55~+150	$^\circ\text{C}$

MOSFET ELECTRICAL CHARACTERISTICS

$T_a=25^\circ\text{C}$ unless otherwise specified


Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Static characteristics						
Drain-source breakdown voltage	BV_{DSS}	$V_{GS} = 0V, I_D = -250\mu A$	-30			V
Zero gate voltage drain current	I_{DSS}	$V_{DS} = -30V, V_{GS} = 0V$			-1	μA
Gate-source leakage current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$			± 100	nA
Drain-source on-resistance (note 1)	$R_{DS(on)}$	$V_{GS} = -10V, I_D = -9A$		19	25	m Ω
		$V_{GS} = -4.5V, I_D = -6A$		27	35	m Ω
Forward transconductance (note 1)	g_{FS}	$V_{DS} = -5V, I_D = -9A$		12		S
Gate threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\mu A$	-1.0	-1.5	-3.0	V
Diode forward voltage (note 1)	V_{SD}	$I_S = -2A, V_{GS} = 0V$			-1.2	V
Dynamic characteristics (note 2)						
Input capacitance	C_{iss}	$V_{DS} = -15V, V_{GS} = 0V, f = 1MHz$		1400		pF
Output capacitance	C_{oss}			163		pF
Reverse transfer capacitance	C_{rss}			145		pF
Switching Characteristics (note 2)						
Turn-on delay time	$t_{d(on)}$	$V_{DD} = -15V, I_D = -1A, V_{GS} = -10V,$ $R_G = 1\Omega, R_L = 15\Omega$			15	ns
Turn-on rise time	t_r				15	ns
Turn-off delay time	$t_{d(off)}$				75	ns
Turn-off fall time	t_f				25	ns
Total gate charge	Q_g	$V_{GS} = -4.5V, V_{DS} = -6V,$ $I_D = -9A$			25	nC
TGate-source charge	Q_{gs}				7	nC
TGate-drain charge	Q_{gd}				12	nC

Notes:


1. Pulse test: Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
2. Guaranteed by design, not subject to production change.
3. Measured with the device mounted on 1 in² FR-4 board with 2oz. copper, in a still air environment with $T_a = 25^\circ\text{C}$.

Typical Characteristics


Output Characteristics

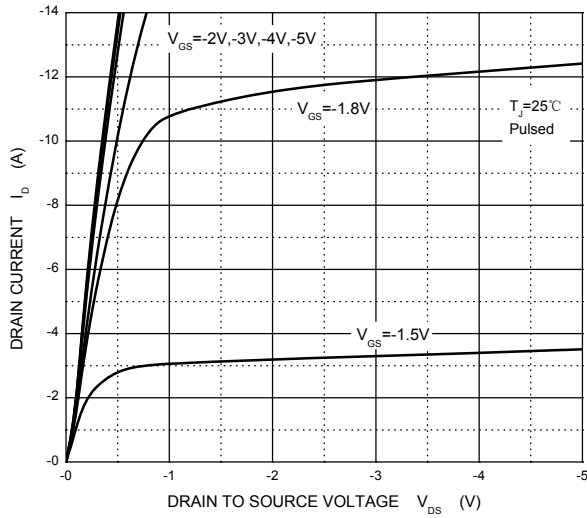


Transfer Characteristics

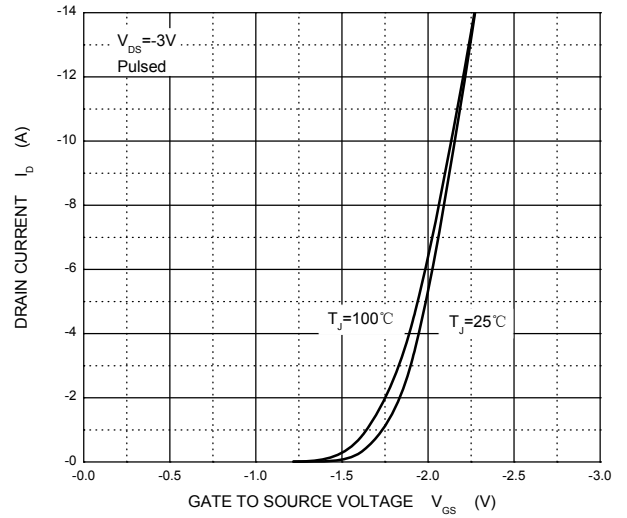


$R_{DS(ON)}$ — I_D

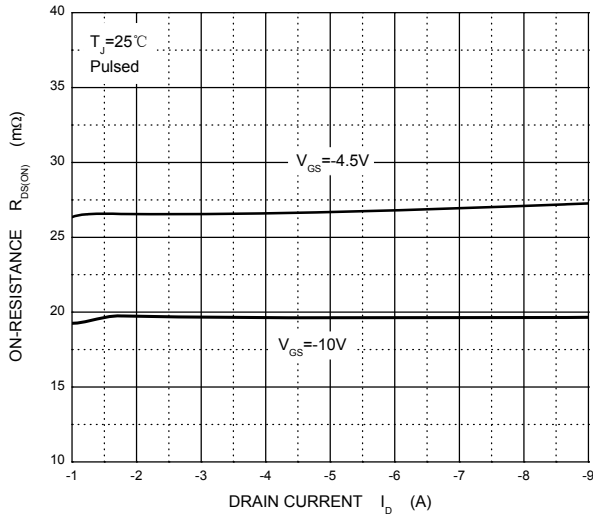


$R_{DS(ON)}$ — V_{GS}

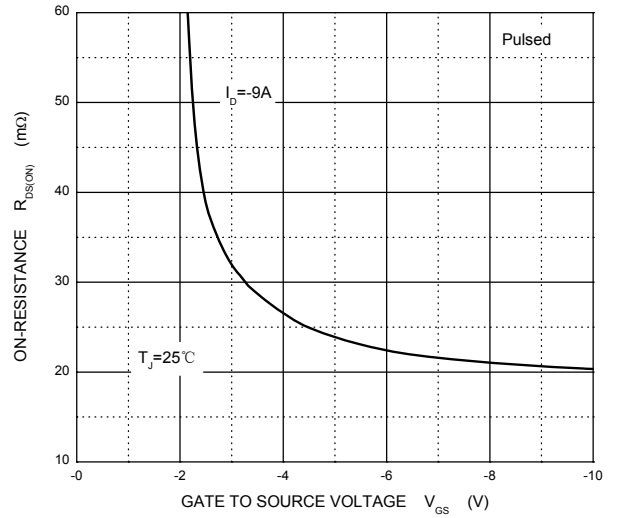


I_S — V_{SD}

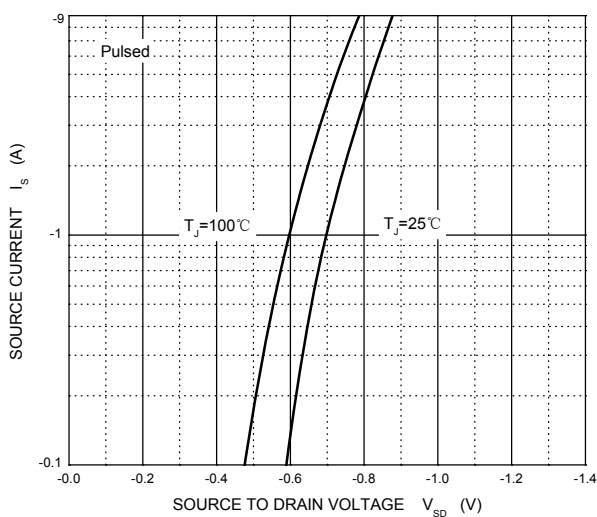


Threshold Voltage

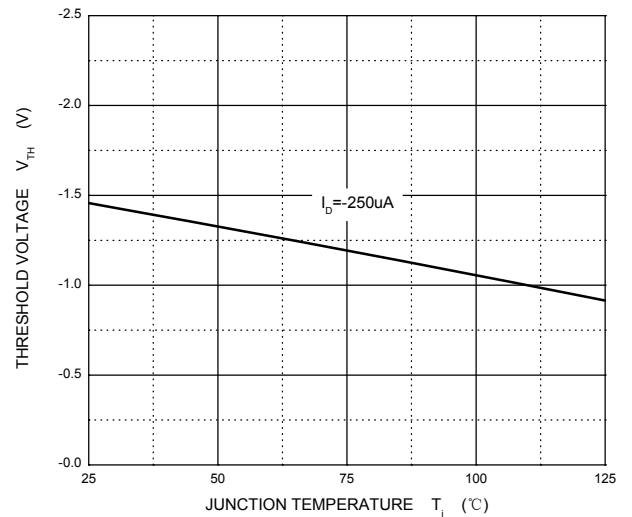


DFNWB2×2-6L-J Package Outline Dimensions

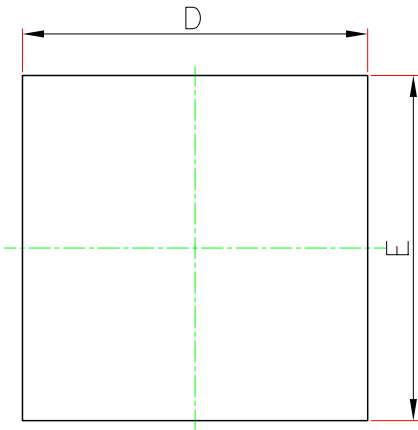

TOP VIEW
[顶视图]

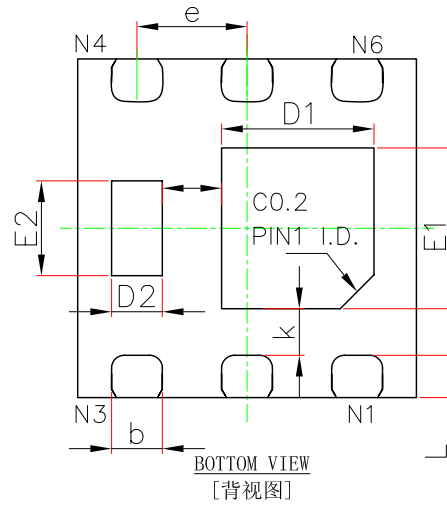


BOTTOM VIEW
[背视图]

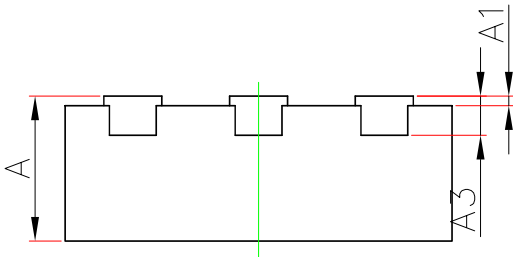

SIDE VIEW
[侧视图]

Symbols	Dimensions in Millimeters		Dimensions in Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
A3	0.203REF.		0.008REF.	
D	1.900	2.100	0.075	0.083
E	1.900	2.100	0.075	0.083
D1	0.800	1.000	0.031	0.039
E1	0.850	1.050	0.033	0.041
D2	0.200	0.400	0.008	0.016
E2	0.460	0.660	0.018	0.026
b	0.250	0.350	0.010	0.014
e	0.650BSC.		0.026BSC.	
k	0.275REF.		0.011REF.	
k1	0.350REF.		0.014REF.	
L	0.174	0.326	0.007	0.013

DFNWB2×2-6L-J Suggested Pad Layout

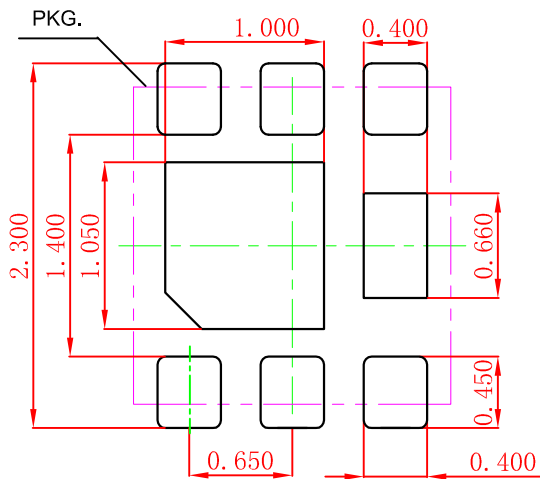


Note:

1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.050\text{mm}$.
3. The pad layout is for reference purposes only.

DFNWB2×2-6L Tape and Reel

DFNWB2×2-6L Embossed Carrier Tape

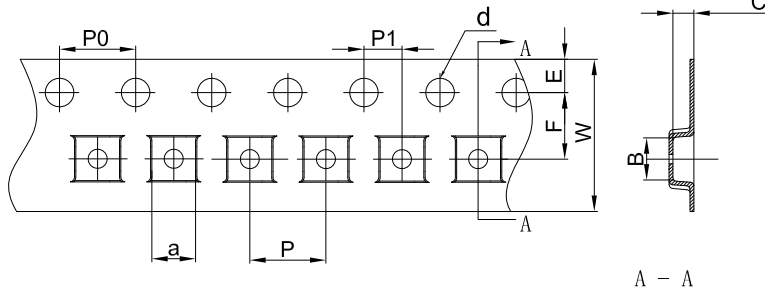


Packaging Description:

DFNWB2×2-6L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 18.0cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).


Dimensions are in millimeter

Pkg type	a	B	C	d	E	F	P0	P	P1	W
DFNWB2×2-6L	2.30	2.30	1.10	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

DFNWB2×2-6L Tape Leader and Trailer

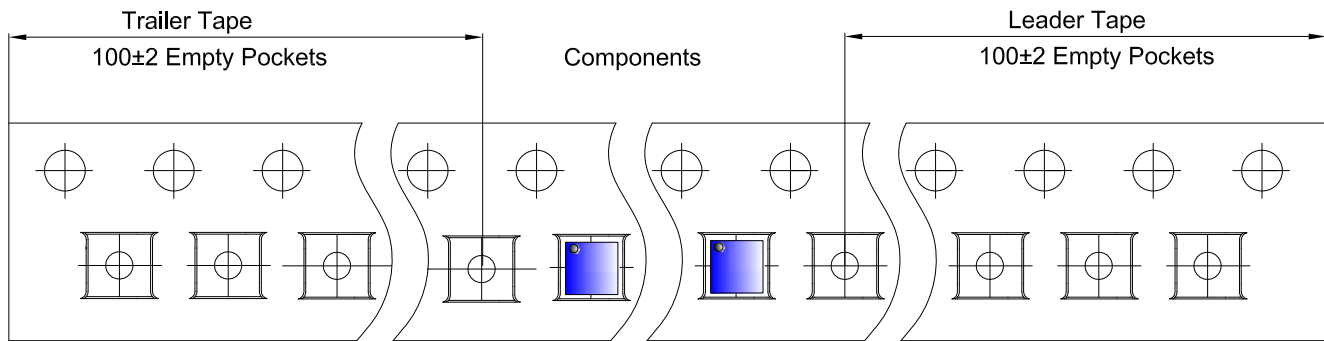

DFNWB2×2-6L Reel

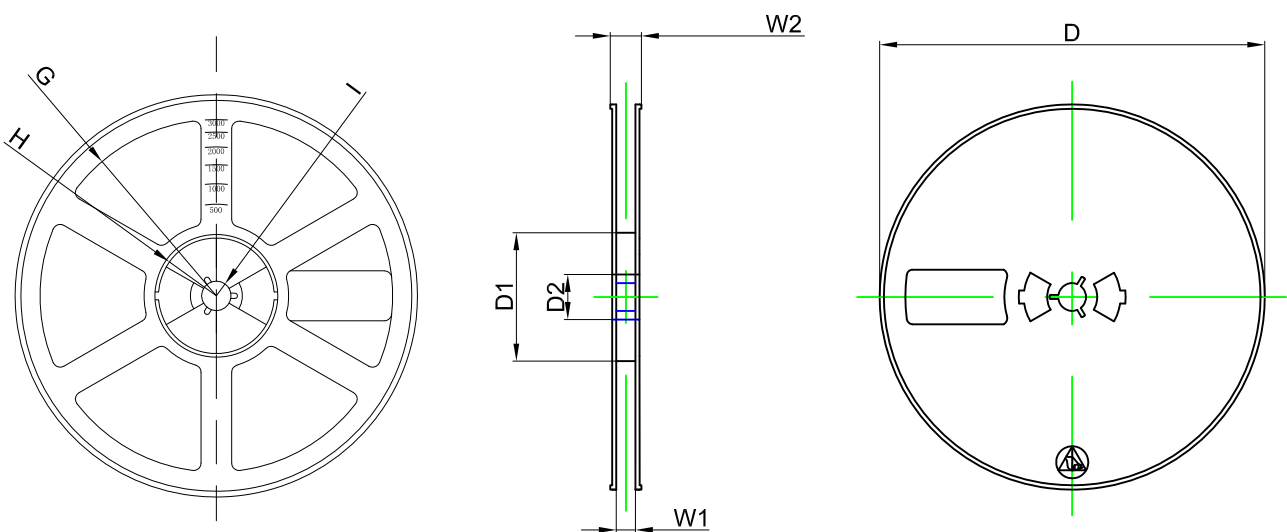

Dimensions are in millimeter

Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Ø180.00	60.00	13.00	R78.00	R25.60	R6.50	9.50	13.10

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	30,000 pcs	203×203×195	120,000 pcs	438×438×220	